

Flexiprint IP20

3528 PLCC2, dual-white, standard bright

FP1-NW02D-500

Specifications

Voltage	24V
Current	2 x 1A
Wattage	2 x 4.8W/m
Number of LEDs	2 x 300pcs
Length of stripe	5m
Viewing angle	120°
Min. bending radius (edges/corners)	30mm
Operating temperature	-15 to +40°C
Storage temperature	-25 to +60°C
CE/RoHS compliant	




Benefits

Adhesive tape on backside
Cutttable every ~100mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	CCT	Intensity lm/m	EEC
FP1-NW02D-500	 warm-white	2800-3500°K	468	F
	 cold-white	5500-7000°K	498	F

Dimensions

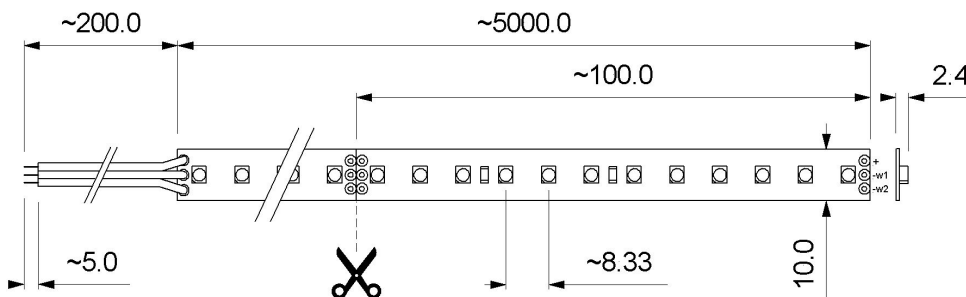

1. All dimensions are in millimetres
2. Length tolerance $\pm 1\%$
3. All strandet wires cross section 0.2mm² AWG #24
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**